

Art. No: **HP31322**

Our smallest version of push-pull prop/aligning strud with minimal maintenance for friction-free operation every day.

Size 2150-2330mm is designed for lighter walls and smaller loads than the bigger struds. Durable and more stable than the competition with no telescoping pipe.

With our props and struds you get new innovative details and solutions.



Grease nipple for best maintenance.



Trapezoidal thread, reliable that can withstand rough handling.



Hot dip galvanized for best rust protection.



Working area from 2150-2330mm




Complies with EN 1065 A



Weight: 6 kg

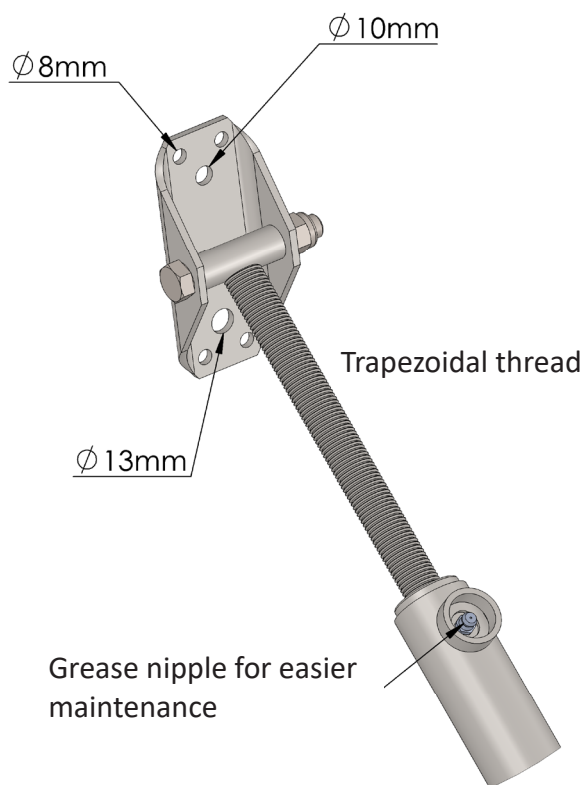

**PRODUCT INFO:**



Complies with EN 1065-A
Used preferable on smaller wooden walls in
and outdoors.


Fine adjustable range 180mm

Weight 6 kg

Hot dip galvanized

[mm]

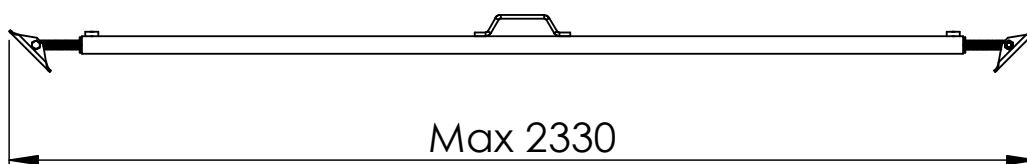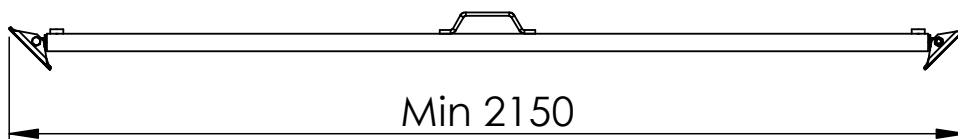

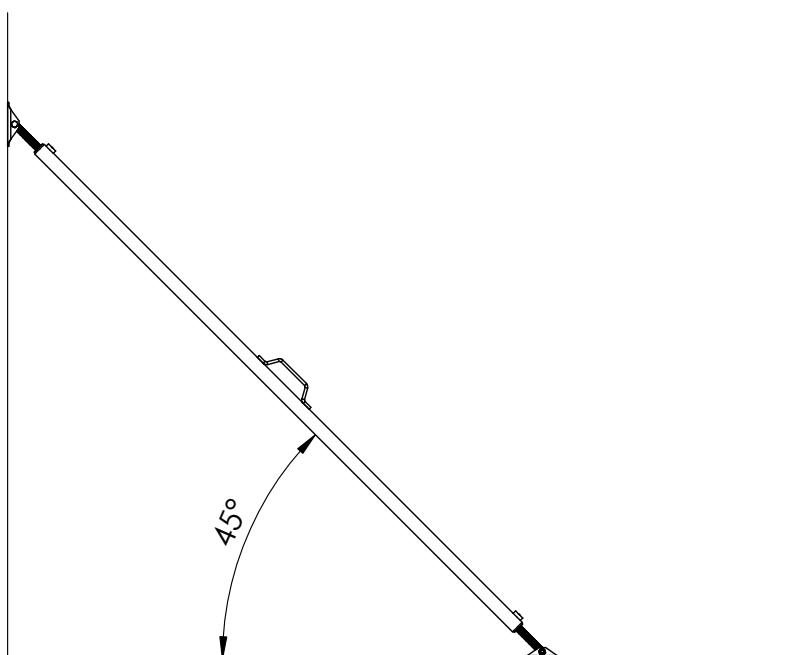

Permissible loads

Y=X [mm]	L [mm]	Allowed load [N]	Angle [°]
1580	2200	9831	45

Calculation of wind loads in accordance with the Swedish Housing Agency's designing rules BKR 2003 chapter 3:6

The props / struds must be mounted as high as possible.

The props / struds are delivered in a stackable hot dip galvanized steel frame box Art.No HP30554.

Pieces: 100st per box. Totalweight about: 650kg

Operation & Maintenance

